










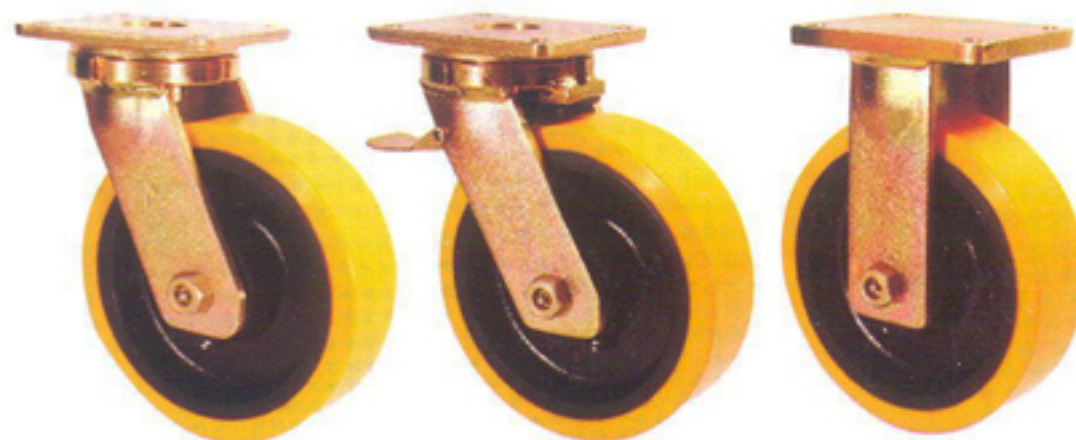


ABLP Forged Precision Bearing Castors with SZS Series Soft Polyurethane Wheels

Muvtons Premium Soft Durometer Polyurethane treaded wheels 83° ±3° Shore A, firmly bonded to precision machined cast iron cores. These wheels have been designed in response to noise problems and allow loads to be cushioned. The use of 'lively' polyurethane materials allows these wheels to 'flex & roll' over debris and obstacles without picking up objects. They are non-marking and floor protective. Tested & Guaranteed against bond failures. Wheel Bearing Options : Sealed precision ball bearings, tapered roller bearings or roller bearings. Temperature range : -20° C to +85° C. Tread Options : Anti-static ; conductive wheels are available. Tread Options : Anti-static ; conductive wheels are available.



Part No. Swivel Castor	Part No. Swivel with Total Lock	Part No. Rigid Castor (mm)	Wheel Dia x Tread Width (mm)	Overall Height (mm)	Swivel Radius (mm)	Swivel Radius with TL (mm)	Top Plate (mm)	Bolt Hole Centers (mm)	Attaching Bolt Size (mm)	Load Cap. (kgs).
										
ABLP-63S-SZS	ABLP-63S-SZS-TL	ABLP-63R-SZS	150 x 75	212	130	140	175 x 140	140 x 105	12	800
ABLP-83S-SZS	ABLP-83S-SZS-TL	ABLP-83R-SZS	200 x 75	264	167	167				1100
ABLP-103S-SZS	ABLP-103S-SZS-TL	ABLP-103R-SZS	250 x 75	314	205	205				1400
ABLP-123S-SZS	ABLP-123S-SZS-TL	ABLP-123R-SZS	300 x 75	365	232	232				1450