







GGSE-SPR Spring Loaded Castors with SJS Series Polyurethane Wheels

Muvtons medium duty Polyurethane treaded wheels $93^{\circ} \pm 3^{\circ}$ Shore A for medium and light applications offer a cost-effective yet a good solution. Polyurethane tread is firmly bonded to precision machined cast iron cores offer smooth & noiseless running, are non-marking and floor protective. Tested & Guaranteed against bond failures. Wheel Bearing Options : Sealed precision ball bearings, tapered roller bearings or roller bearings. Colour: Light Brown. Temperature range : -20°C to $+85^{\circ} \text{C}$.

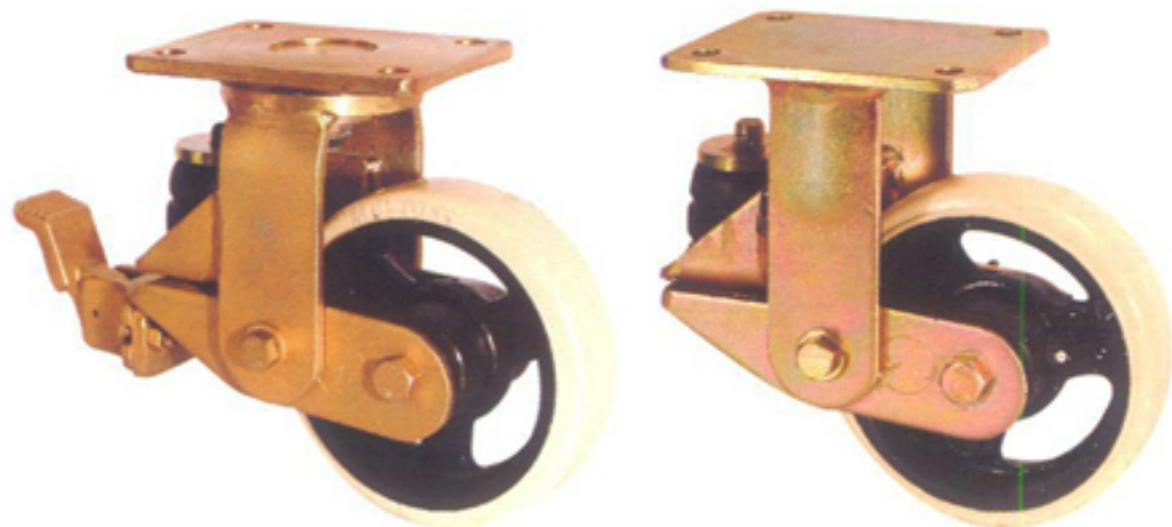

Part No. Swivel Castor	Part No. Swivel with Wheel Brake	Part No. Rigid Castor (mm)	Wheel Dia x Tread Width (mm)	Overall Height At no load (mm)	Overall Height Fully Loaded (mm)	Swivel Radius (mm)	Swivel Radius with WFB (mm)	Top Plate (mm)	Bolt Hole Centers (mm)	Attaching Bolt Size (mm)	Load Cap. (kgs).
											
GGSE-SPR-42S-SJS	GGSE-SPR-42S-SJS-WFB	GGSE-SPR-42R-SJS	100 x 50	165	145	115	130	138 x 110	105 x 75-80	10	325
GGSE-SPR-52S-SJS	GGSE-SPR-52S-SJS-WFB	GGSE-SPR-52R-SJS	125 x 50	180	160	143	142				450
GGSE-SPR-62S-SJS	GGSE-SPR-62S-SJS-WFB	GGSE-SPR-62R-SJS	150 x 50	203	183	165	155				550
GGSE-SPR-82S-SJS	GGSE-SPR-82S-SJS-WFB	GGSE-SPR-82R-SJS	200 x 50	257	237	182	182				600