





# GHKE-SPR Spring Loaded Castors with SAS Series Polyurethane Wheels

Muvtons Premium Polyurethane treaded wheels  $93^{\circ} \pm 3^{\circ}$  Shore A, firmly bonded to precision machined cast iron cores offer low rolling resistance, smooth & noiseless running, are non-marking and floor protective. These wheels possess high abrasion & cut resistance and are resistant to tearing. Tested & Guaranteed against bond failures. Wheel Bearing Options : Sealed precision ball bearings, tapered roller bearings or roller bearings. Colour: Light Brown. Temperature range :  $-20^{\circ} \text{C}$  to  $+85^{\circ} \text{C}$ . Tread Options : Anti-static ; conductive wheels are available.

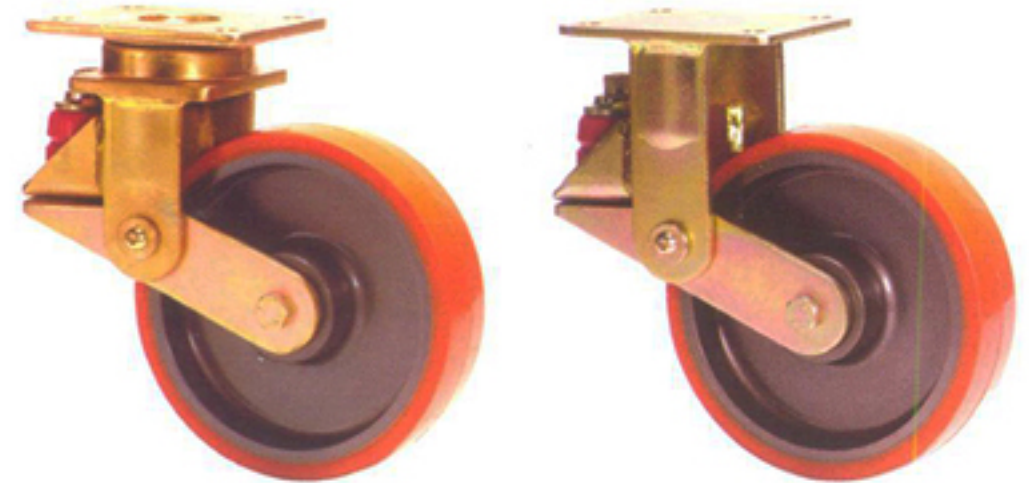

Part No. Swivel Castor	Part No. Swivel with Wheel Brake	Part No. Rigid Castor (mm)	Wheel Dia x Tread Width (mm)	Overall Height At no load (mm)	Overall Height Fully Loaded (mm)	Swivel Radius (mm)	Swivel Radius with WFB (mm)	Top Plate (mm)	Bolt Hole Centers (mm)	Attaching Bolt Size (mm)	Load Cap. (kgs).
											
GHKE-SPR-42S-SAS	GHKE-SPR-42S-SAS-WFB	GHKE-SPR-42R-SAS	100 x 50	165	145	115	120	138 x 110	105 x 75-80	10	400
GHKE-SPR-52S-SAS	GHKE-SPR-52S-SAS-WFB	GHKE-SPR-52R-SAS	125 x 50	180	160	143	142				550
GHKE-SPR-62S-SAS	GHKE-SPR-62S-SAS-WFB	GHKE-SPR-62R-SAS	150 x 50	203	183	165	155				750
GHKE-SPR-82S-SAS	GHKE-SPR-82S-SAS-WFB	GHKE-SPR-82R-SAS	200 x 50	257	237	182	182				900