










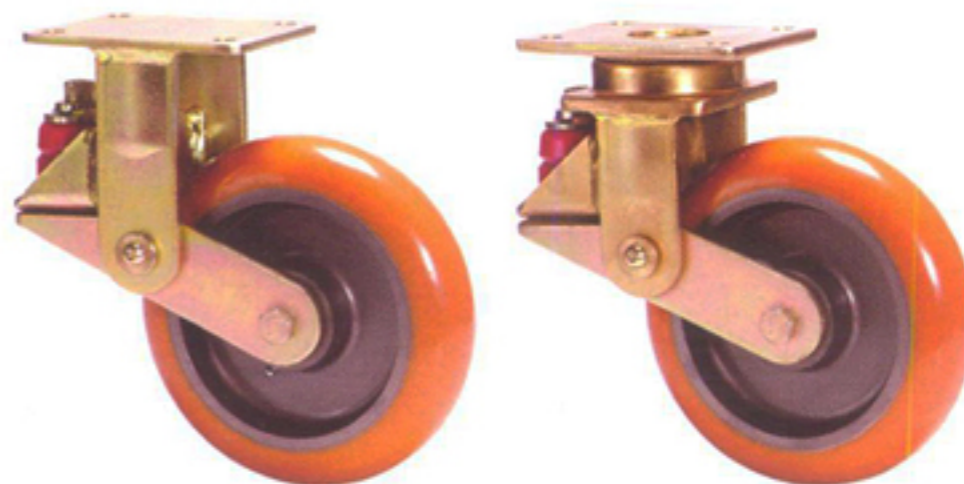



GHKE-SPR Spring Loaded Castors with ME Series Ergonomic Wheels

Muvtons Ergonomic Wheels for effortless rolling, very low push-pull efforts required to move heavy loads. Generous amount of premium Polyurethane 93° ±3° Shore A, firmly bonded, mechanically & chemically, to precision machined cores. Proven for excellent performance in most demanding applications for manual and power towing. They are non-marking and floor protective. Tested & Guaranteed against bond failures. Softer 83° ±3° Shore A Durometer for greater tractive resistance and harder 73° ±3° Shore D polyurethane treads for extremely low rolling resistance are also offered. Wheel Bearing Options : Sealed precision ball bearings, tapered roller bearings or roller bearings. Temperature range : -20° C to +85° C. Tread Options : Anti-static ; conductive wheels are available.



Part No. Swivel Castor	Part No. Swivel with Wheel Brake	Part No. Rigid Castor	Wheel Dia x Tread Width (mm)	Overall Height At no load (mm)	Overall Height Fully Loaded (mm)	Swivel Radius (mm)	Swivel Radius with WFB (mm)	Top Plate (mm)	Bolt Hole Centers (mm)	Attaching Bolt Size (mm)	Load Cap. (kgs).
											
GHKE-SPR-42S-ME	GHKE-SPR-42S-ME-WFB	GHKE-SPR-42R-ME	100 x 50	165	145	115	120	138 x 110	105 x 75-80	10	350
GHKE-SPR-52S-ME	GHKE-SPR-52S-ME-WFB	GHKE-SPR-52R-ME	125 x 50	180	160	143	142				450
GHKE-SPR-62S-ME	GHKE-SPR-62S-ME-WFB	GHKE-SPR-62R-ME	150 x 50	203	183	165	155				575
GHKE-SPR-82S-ME	GHKE-SPR-82S-ME-WFB	GHKE-SPR-82R-ME	200 x 50	257	237	182	182				775