


GHKE-SPR Spring Loaded Castors with SZS Series Soft Polyurethane Wheels

Muvtons Premium Soft Durometer Polyurethane treaded wheels 83° ±3° Shore A, firmly bonded to precision machined cast iron cores. These wheels have been designed in response to noise problems and allow loads to be cushioned. The use of 'lively' polyurethane materials allows these wheels to 'flex & roll' over debris and obstacles without picking up objects. They are non-marking and floor protective. Tested & Guaranteed against bond failures. Wheel Bearing Options : Sealed precision ball bearings, tapered roller bearings or roller bearings. Temperature range : -20° C to +85° C. Tread Options : Anti-static ; conductive wheels are available. Tread Options : Anti-static ; conductive wheels are available.

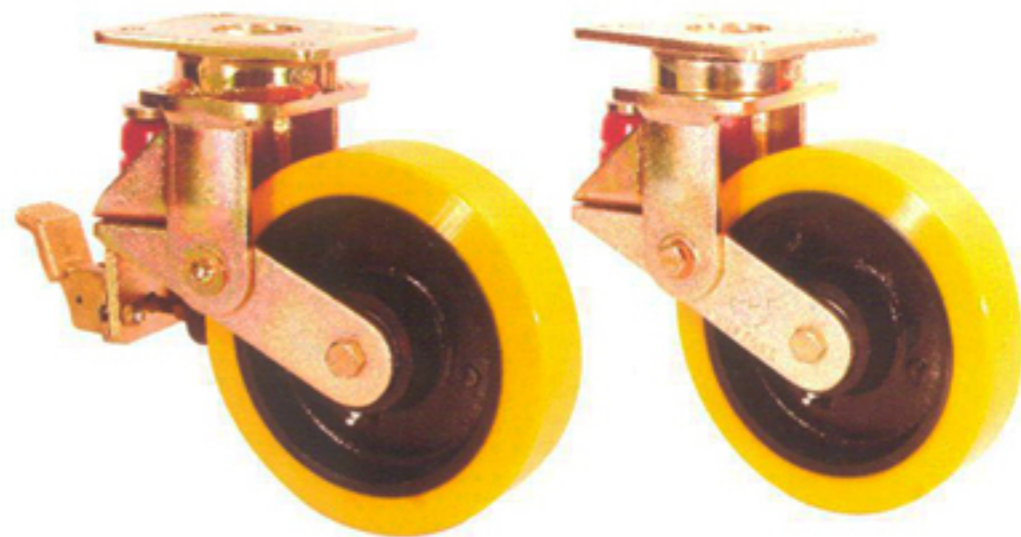

Part No. Swivel Castor	Part No. Swivel with Wheel Brake	Part No. Rigid Castor (mm)	Wheel Dia x Tread Width (mm)	Overall Height At no load (mm)	Overall Height Fully Loaded (mm)	Swivel Radius (mm)	Swivel Radius with WFB (mm)	Top Plate (mm)	Bolt Hole Centers (mm)	Attaching Bolt Size (mm)	Load Cap. (kgs).
											
GHKE-SPR-42S-SZS	GHKE-SPR-42S-SZS-WFB	GHKE-SPR-42R-SZS	100 x 50	165	145	115	120	138 x 110	105 x 75-80	10	250
GHKE-SPR-52S-SZS	GHKE-SPR-52S-SZS-WFB	GHKE-SPR-52R-SZS	125 x 50	180	160	143	142				330
GHKE-SPR-62S-SZS	GHKE-SPR-62S-SZS-WFB	GHKE-SPR-62R-SZS	150 x 50	203	183	165	155				450
GHKE-SPR-82S-SZS	GHKE-SPR-82S-SZS-WFB	GHKE-SPR-82R-SZS	200 x 50	257	237	182	182				650