










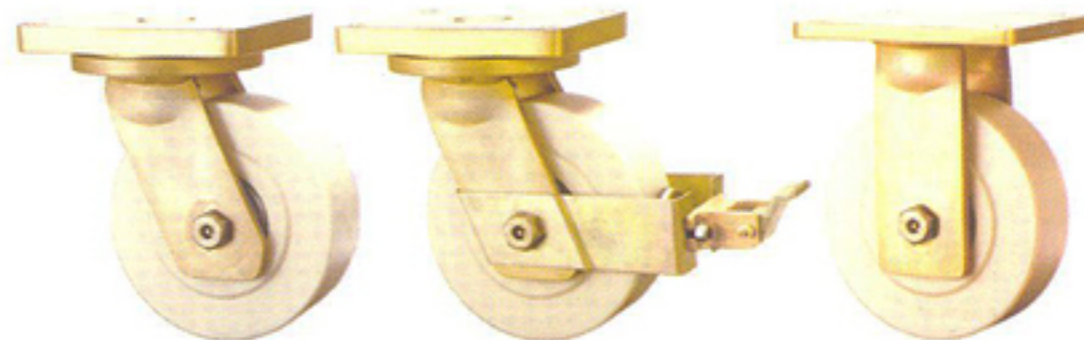


ABE75 Forged Precision Bearing Castors with MCNY Series Polyamide Wheels

Muvtons MCNY Wheels produced from high impact resistant cast polyamide are the ultimate choice for extremely high loads where metallic wheels are not an option. These wheels possess very high abrasion resistance and offer low rolling resistance under extreme loads. Can be used in corrosive applications. Wheel Bearing Options : Sealed precision ball bearings, tapered roller bearings or plain bore. Temperature range : -30° C to +80° C.



Part No. Swivel Castor	Part No. Swivel with Wheel Brake	Part No. Rigid Castor (mm)	Wheel Dia x Tread Width (mm)	Overall Height (mm)	Swivel Radius (mm)	Swivel Radius with WFB (mm)	Top Plate (mm)	Bolt Hole Centers (mm)	Attaching Bolt Size (mm)	Load Cap. (kgs).
										
ABE75-83S-MCNY	ABE75-83S-MCNY-WFB	ABE75-83R-MCNY	200 x 80	280	165	325	255 x 200	210 x 160	16	4500
ABE75-104S-MCNY	ABE75-104S-MCNY-WFB	ABE75-104R-MCNY	250 x 100	330	195	355				7500
ABE75-124S-MCNY	ABE75-124S-MCNY-WFB	ABE75-124R-MCNY	300 x 100	395	235	395				7500