










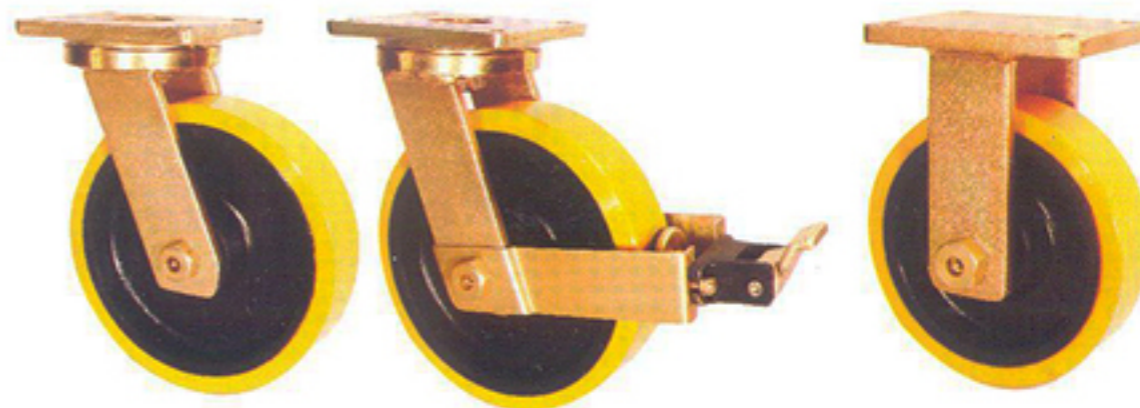


# ABE50 Forged Precision Bearing Castors with SZS Series Soft Polyurethane Wheels

Muvtons Premium Soft Durometer Polyurethane treaded wheels 83° ±3° Shore A, firmly bonded to precision machined cast iron cores. These wheels have been designed in response to noise problems and allow loads to be cushioned. The use of 'lively' polyurethane materials allows these wheels to 'flex & roll' over debris and obstacles without picking up objects. They are non-marking and floor protective. Tested & Guaranteed against bond failures. Wheel Bearing Options : Sealed precision ball bearings, tapered roller bearings or roller bearings. Temperature range : -20° C to +85° C. Tread Options : Anti-static ; conductive wheels are available. Tread Options : Anti-static ; conductive wheels are available.



Part No. Swivel Castor	Part No. Swivel with Wheel Brake	Part No. Rigid Castor (mm)	Wheel Dia x Tread Width (mm)	Overall Height (mm)	Swivel Radius (mm)	Swivel Radius with WFB (mm)	Top Plate (mm)	Bolt Hole Centers (mm)	Attaching Bolt Size (mm)	Load Cap. (kgs).
										
ABE50-63S-SZS	ABE50-63S-SZS-WFB	ABE50-63R-SZS	150 x 75	212	136	290	200 x 160	160 x 120	16	800
ABE50-83S-SZS	ABE50-83S-SZS-WFB	ABE50-83R-SZS	200 x 75	264	165	325				1100
ABE50-103S-SZS	ABE50-103S-SZS-WFB	ABE50-103R-SZS	250 x 75	314	205	365				1400
ABE50-123S-SZS	ABE50-123S-SZS-WFB	ABE50-123R-SZS	300 x 75	375	230	385				1450