










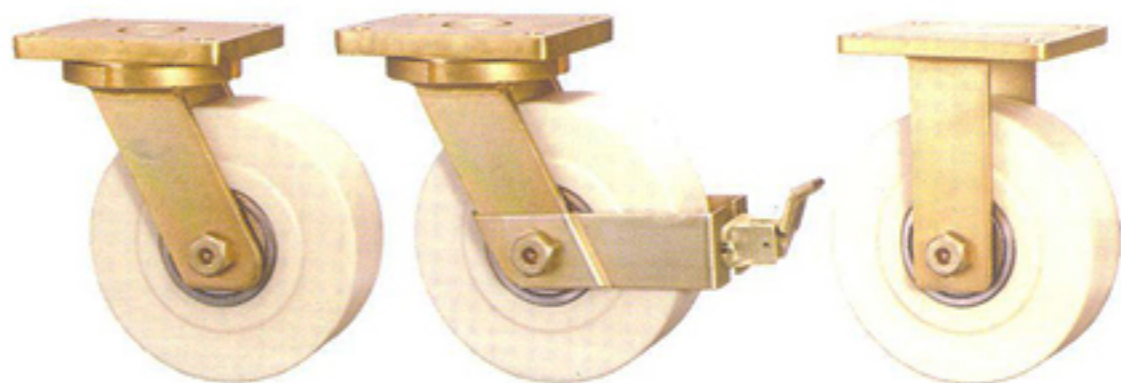


# ABE50 Forged Precision Bearing Castors with MCNY Series Cast Polyamide Wheels

Muvtons MCNY Wheels produced from high impact resistant cast polyamide are the ultimate choice for extremely high loads where metallic wheels are not an option. These wheels possess very high abrasion resistance and offer low rolling resistance under extreme loads. Can be used in corrosive applications. Wheel Bearing Options : Sealed precision ball bearings, tapered roller bearings or plain bore. Temperature range : -30° C to +80° C.



Part No. Swivel Castor	Part No. Swivel with Wheel Brake	Part No. Rigid Castor (mm)	Wheel Dia x Tread Width (mm)	Overall Height (mm)	Swivel Radius (mm)	Swivel Radius with WFB (mm)	Top Plate (mm)	Bolt Hole Centers (mm)	Attaching Bolt Size (mm)	Load Cap. (kgs).
										
ABE50-63S-MCNY	ABE50-63S-MCNY-WFB	ABE50-63R-MCNY	150 x 80	212	136	290	200 x 60	160 x 120	16	3000
ABE50-83S-MCNY	ABE50-83S-MCNY-WFB	ABE50-83R-MCNY	200 x 80	264	165	325				4500
ABE50-103S-MCNY	ABE50-103S-MCNY-WFB	ABE50-103R-MCNY	250 x 80	314	205	365				5000
ABE50-123S-MCNY	ABE50-123S-MCNY-WFB	ABE50-123R-MCNY	300 x 80	375	230	385				5000
ABE50-163S-MCNY	ABE50-163S-MCNY-WFB	ABE50-163R-MCNY	400 x 80	475	300	445				5000