










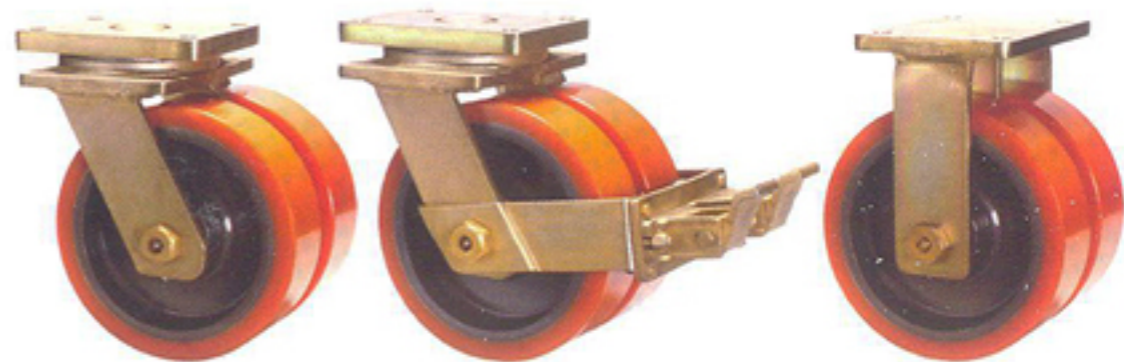


DABE50 Forged Twin Wheel Castors with SAS Series Polyurethane Wheels

Muvtons Premium Polyurethane treaded wheels $93^{\circ} \pm 3^{\circ}$ Shore A, firmly bonded to precision machined cast iron cores offer low rolling resistance, smooth & noiseless running, are non-marking and floor protective. These wheels possess high abrasion & cut resistance and are resistant to tearing. Tested & Guaranteed against bond failures. Wheel Bearing Options : Sealed precision ball bearings, tapered roller bearings or roller bearings. Colour: Light Brown. Temperature range : -20° C to $+85^{\circ}$ C. Tread Options : Anti-static ; conductive wheels are available.



| Part No. Swivel Castor | Part No. Swivel with Wheel Brake | Part No. Rigid Castor (mm) | Wheel Dia x Tread Width (mm) | Overall Height (mm) | Swivel Radius (mm) | Swivel Radius with WFB (mm) | Top Plate (mm) | Bolt Hole Centers (mm) | Attaching Bolt Size (mm) | Load Cap. (kgs). |
|---|--|---|---|---|---|---|--|--|---|---|
|  |  |  |  |  |  |  |  |  |  |  |
| DABE50-63S-SAS | DABE50-63S-SAS-WFB | DABE50-63R-SAS | 150 x 75 x 2 | 212 | 160 | 310 | 200 x 160 | 160 x 120 | 16 | 2100 |
| DABE50-83S-SAS | DABE50-83S-SAS-WFB | DABE50-83R-SAS | 200 x 75 x 2 | 264 | 190 | 350 | | | | 2800 |
| DABE50-103S-SAS | DABE50-103S-SAS-WFB | DABE50-103R-SAS | 250 x 75 x 2 | 314 | 220 | 375 | | | | 3600 |
| DABE50-123S-SAS | DABE50-123S-SAS-WFB | DABE50-123R-SAS | 300 x 75 x 2 | 375 | 245 | 395 | | | | 4400 |
| DABE50-163S-SAS | DABE50-163S-SAS-WFB | DABE50-163R-SAS | 400 x 75 x 2 | 475 | 310 | 450 | | | | 5000 |