










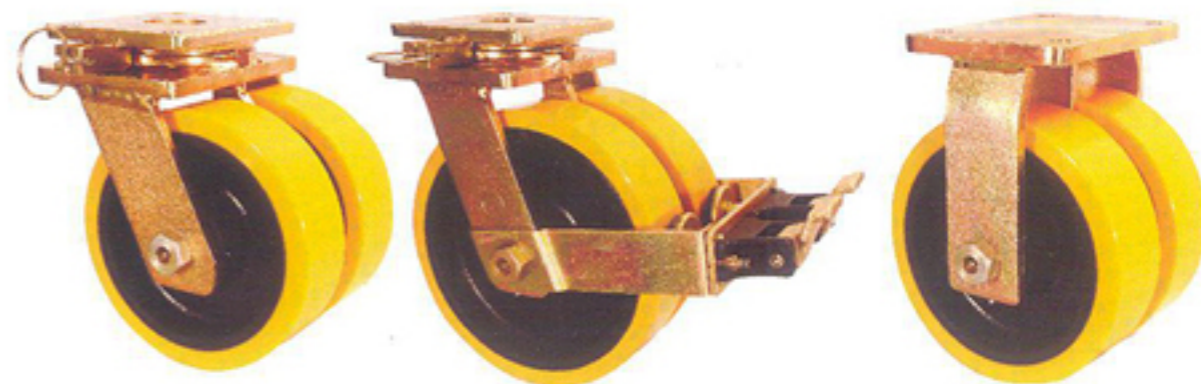


DABE50 Forged Twin Wheel Castors with SZS Series Soft Polyurethane Wheels

Muvtons Premium Soft Durometer Polyurethane treaded wheels $83^{\circ} \pm 3^{\circ}$ Shore A, firmly bonded to precision machined cast iron cores. These wheels have been designed in response to noise problems and allow loads to be cushioned. The use of 'lively' polyurethane materials allows these wheels to 'flex & roll' over debris and obstacles without picking up objects. They are non-marking and floor protective. Tested & Guaranteed against bond failures. Wheel Bearing Options : Sealed precision ball bearings, tapered roller bearings or roller bearings. Temperature range : -20°C to $+85^{\circ} \text{C}$. Tread Options : Anti-static ; conductive wheels are available. Tread Options : Anti-static ; conductive wheels are available.



Part No. Swivel Castor	Part No. Swivel with Wheel Brake	Part No. Rigid Castor (mm)	Wheel Dia x Tread Width (mm)	Overall Height (mm)	Swivel Radius (mm)	Swivel Radius with WFB (mm)	Top Plate (mm)	Bolt Hole CentERS (mm)	Attaching Bolt Size (mm)	Load Cap. (kgs).
										
DABE50-63S-SZS	DABE50-63S-SZS-WFB	DABE50-63R-SZS	150 x 75 x 2	212	160	310	200 x 160	160 x 120	16	1600
DABE50-83S-SZS	DABE50-83S-SZS-WFB	DABE50-83R-SZS	200 x 75 x 2	264	190	2200				
DABE50-103S-SZS	DABE50-103S-SZS-WFB	DABE50-103R-SZS	250 x 75 x 2	314	220	2800				
DABE50-123S-SZS	DABE50-123S-SZS-WFB	DABE50-123R-SZS	300 x 75 x 2	375	245	2900				