










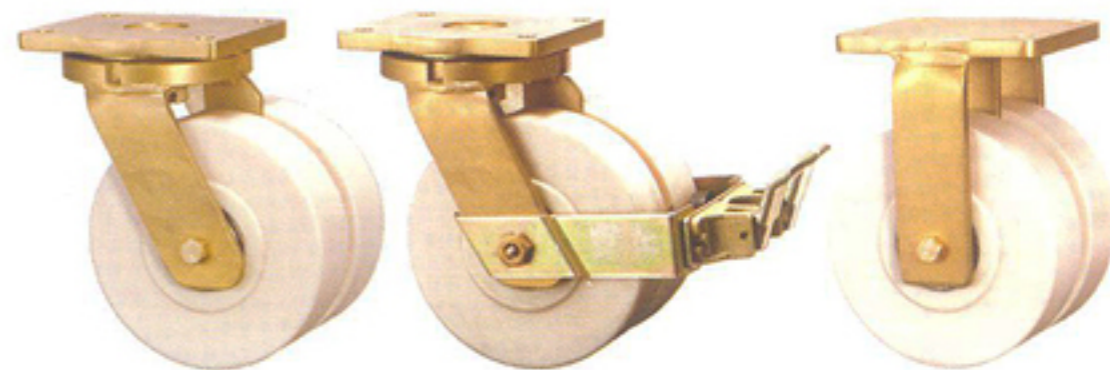


DBLP Forged Twin Wheel Castors with MCNY Series Cast Polyamide Wheels

Muvtons MCNY Wheels produced from high impact resistant cast polyamide are the ultimate choice for extremely high loads where metallic wheels are not an option. These wheels possess very high abrasion resistance and offer low rolling resistance under extreme loads. Can be used in corrosive applications. Wheel Bearing Options : Sealed precision ball bearings, tapered roller bearings or plain bore. Temperature range : -30° C to +80° C.



Part No. Swivel Castor	Part No. Swivel with Wheel Brake	Part No. Rigid Castor (mm)	Wheel Dia x Tread Width (mm)	Overall Height (mm)	Swivel Radius (mm)	Swivel Radius with WFB (mm)	Top Plate (mm)	Bolt Hole Centers (mm)	Attaching Bolt Size (mm)	Load Cap. (kgs).
										
DABLP-522S-MCNY	DABLP-522S-MCNY-WFB	DABLP-522R-MCNY	125 x 50 x 2	185	120	245	175 x 140	140 x 105	12	2000
DABLP-622S-MCNY	DABLP-622S-MCNY-WFB	DABLP-622R-MCNY	150 x 50 x 2	212	140	265				2000
DABLP-822S-MCNY	DABLP-822S-MCNY-WFB	DABLP-822R-MCNY	200 x 50 x 2	264	175	303				2000
DABLP-1022S-MCNY	DABLP-1022S-MCNY-WFB	DABLP-1022R-MCNY	250 x 50 x 2	314	212	340				2000
DABLP-1222S-MCNY	DABLP-1222S-MCNY-WFB	DABLP-1222R-MCNY	300 x 50 x 2	365	240	368				2000