










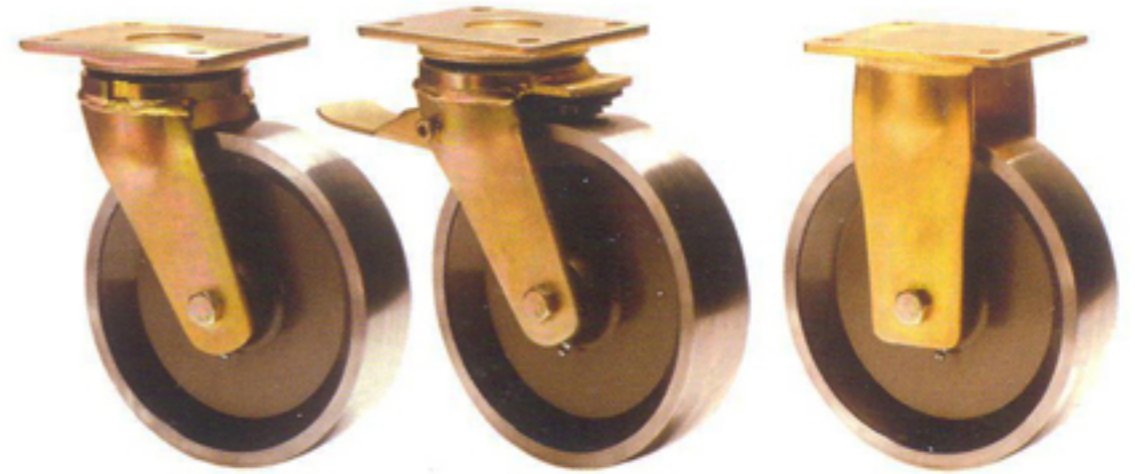


SAB Forged Precision Bearing Castors with DF Series Drop Forged Steel Wheels

Muvtons Drop Forged Wheels are hot forged from Alloy Steels and can be used in the roughest of applications on the poorest of floors. These are virtually in-destructible within their capacity range. Tread faces are fully machined for easy maneuverability - these wheels offer high abrasion and oil resistance. Wheel Bearing Options : Sealed precision ball bearings, tapered roller bearings or roller bearings. Temperature range : -100° C to +600° C.



Part No. Swivel Castor	Part No. Swivel with Total Lock	Part No. Rigid Castor (mm)	Wheel Dia x Tread Width (mm)	Overall Height (mm)	Swivel Radius (mm)	Swivel Radius with TL (mm)	Top Plate (mm)	Bolt Hole Centers (mm)	Attaching Bolt Size (mm)	Load Cap. (kgs).
										
SAB-42S-DF	SAB-42S-DF-TL	SAB-42R-DF	100 x 50	150	95	95	138 x 110	105 x 75-80	10	800
SAB-52S-DF	SAB-52S-DF-TL	SAB-52R-DF	125 x 50	175	120	110				1000
SAB-62S-DF	SAB-62S-DF-TL	SAB-62R-DF	150 x 50	200	130	135				1200
SAB-82S-DF	SAB-82S-DF-TL	SAB-82R-DF	200 x 50	250	155	160				1500