










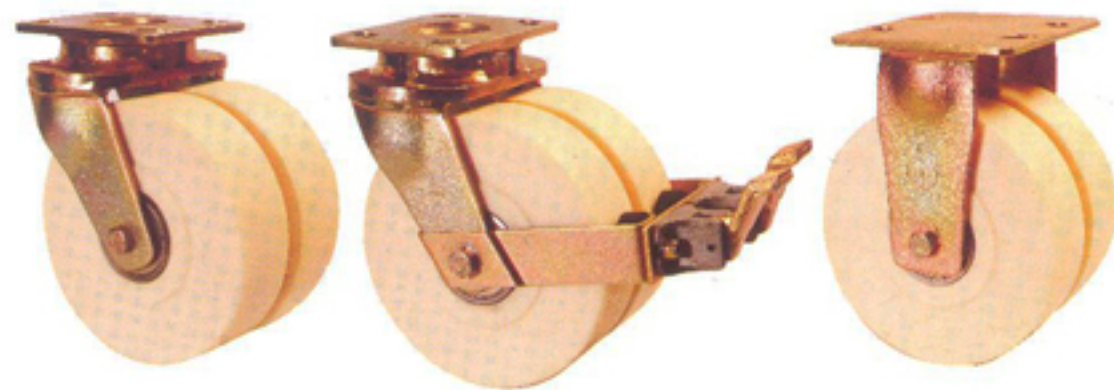


GRDDE Twin Wheel Castors with MCNY Series Cast Polyamide Wheels

Muvtons MCNY Wheels produced from high impact resistant cast polyamide are the ultimate choice for extremely high loads where metallic wheels are not an option. These wheels possess very high abrasion resistance and offer low rolling resistance under extreme loads. Can be used in corrosive applications. Wheel Bearing Options : Sealed precision ball bearings, tapered roller bearings or plain bore. Temperature range : -30° C to +80° C.



Part No. Swivel Castor	Part No. Swivel with Wheel Brake	Part No. Rigid Castor (mm)	Wheel Dia x Tread Width (mm)	Overall Height (mm)	Swivel Radius (mm)	Swivel Radius with WFB (mm)	Top Plate (mm)	Bolt Hole Centers (mm)	Attaching Bolt Size (mm)	Load Cap. (kgs).
										
GRDDE-42S-MCNY	GRDDE-42S-MCNYI-WFB	GRDDE-42R-MCNY	100 x 50 x 2	150	125	250	150 x 110	105 x 80 Slotted to 121/59	12	1500
GRDDE-52S-MCNY	GRDDE-52S-MCNY-WFB	GRDDE-52R-MCNY	125 x 50 x 2	177	127	254				1500
GRDDE-62S-MCNY	GRDDE-62S-MCNY-WFB	GRDDE-62R-MCNY	150 x 50 x 2	200	144	265				1500
GRDDE-82S-MCNY	GRDDE-82S-MCNY-WFB	GRDDE-82R-MCNY	200 x 50 x 2	250	167	300				1500
GRDDE-102S-MCNY	GRDDE-102S-MCNY-WFB	GRDDE-102R-MCNY	250 x 50 x 2	300	205	328				1500