










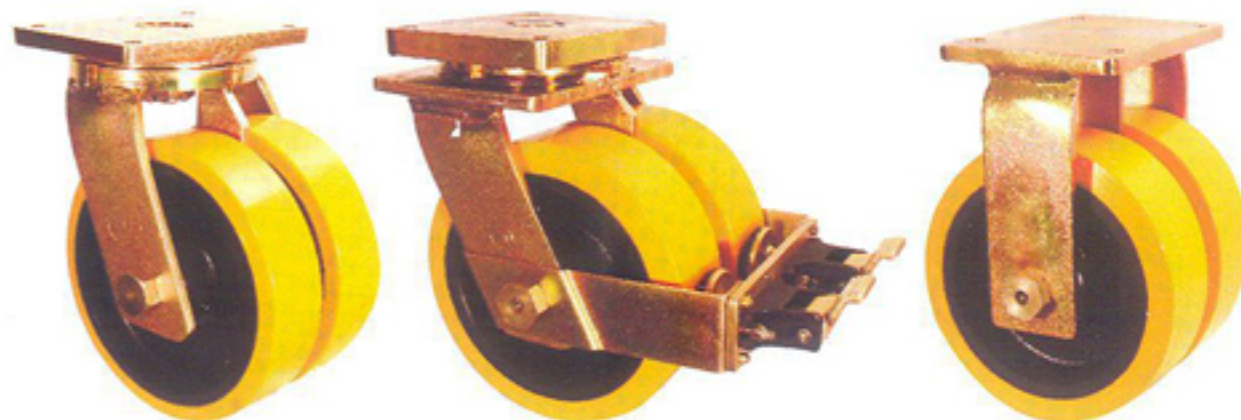


# DABE75 Twin Wheel Castors with SZS Series Soft Polyurethane Wheels

Muvtons Premium Soft Durometer Polyurethane treaded wheels  $83^{\circ} \pm 3^{\circ}$  Shore A, firmly bonded to precision machined cast iron cores. These wheels have been designed in response to noise problems and allow loads to be cushioned. The use of 'lively' polyurethane materials allows these wheels to 'flex & roll' over debris and obstacles without picking up objects. They are non-marking and floor protective. Tested & Guaranteed against bond failures. Wheel Bearing Options : Sealed precision ball bearings, tapered roller bearings or roller bearings. Temperature range :  $-20^{\circ} \text{C}$  to  $+85^{\circ} \text{C}$ . Tread Options : Anti-static ; conductive wheels are available. Tread Options : Anti-static ; conductive wheels are available.



Part No. Swivel Castor	Part No. Swivel with Wheel Brake	Part No. Rigid Castor (mm)	Wheel Dia x Tread Width (mm)	Overall Height (mm)	Swivel Radius (mm)	Swivel Radius with WFB (mm)	Top Plate (mm)	Bolt Hole Centers (mm)	Attaching Bolt Size (mm)	Load Cap. (kgs).
										
DABE75-84S-SZS	DABE75-84S-SZS-WFB	DABE75-84R-SZS	200 x 100 x 2	280	200	350	255 x 200	210 x 160	16	2800
DABE75-104S-SZS	DABE75-104S-SZS-WFB	DABE75-104R-SZS	250 x 100 x 2	330	226	375				3200
DABE75-124S-SZS	DABE75-124S-SZS-WFB	DABE75-124R-SZS	300 x 100 x 2	395	261	420				4000
DABE75-164S-SZS	DABE75-164S-SZS-WFB	DABE75-164R-SZS	400 x 100 x 2	495	320	455				5200