










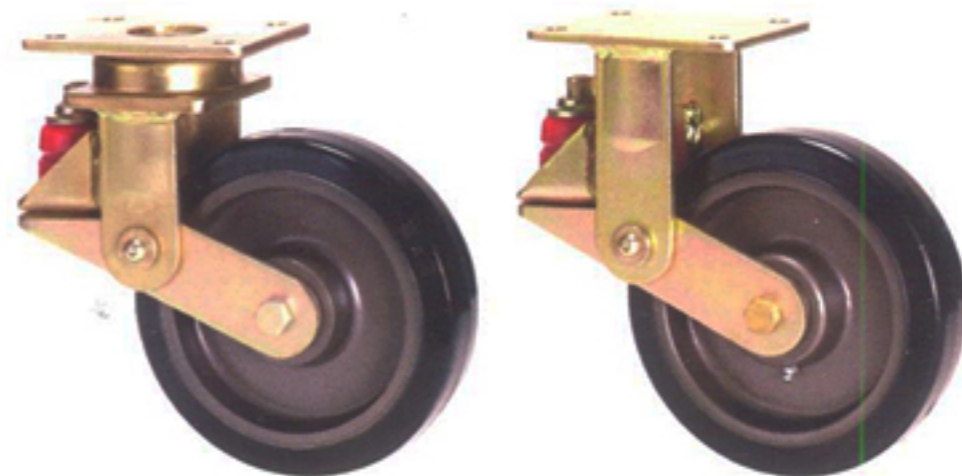



# GHKE-SPR Spring Loaded Castors with SEB Series Elastic Rubber Type Wheels

Muvtons - black Elastic Rubber tyred wheels firmly chemically bonded to precision machined cast iron cores. Highly resilient 75° ±5° Shore A rubber provides very smooth and silent running. Can be used for power towing applications by suitably de-rating the load capacity. Wheel Bearing Options : Sealed precision ball bearings, tapered roller bearings or roller bearings. Temperature range : -20° C to +75° C. Tread Options : Anti-static; conductive and oil resistant wheels are available.



Part No. Swivel Castor	Part No. Swivel with Wheel Brake	Part No. Rigid Castor	Wheel Dia x Tread Width (mm)	Overall Height At no load (mm)	Overall Height Fully Loaded (mm)	Swivel Radius (mm)	Swivel Radius with WFB (mm)	Top Plate (mm)	Bolt Hole Centers (mm)	Attaching Bolt Size (mm)	Load Cap. (kgs).
											
GHKE-SPR-42S-SEB	GHKE-SPR-42S-SEB-WFB	GHKE-SPR-42R-SEB	100 x 50	165	145	115	120	138 x 110	105 x 75-80	10	210
GHKE-SPR-52S-SEB	GHKE-SPR-52S-SEB-WFB	GHKE-SPR-52R-SEB	125 x 50	180	160	143	142				275
GHKE-SPR-62S-SEB	GHKE-SPR-62S-SEB-WFB	GHKE-SPR-62R-SEB	150 x 50	203	183	165	155				350
GHKE-SPR-82S-SEB	GHKE-SPR-82S-SEB-WFB	GHKE-SPR-82R-SEB	200 x 50	257	237	182	182				450