


# BDS Series Castors with NY Series Nylon Wheels

Injection Moulded from high quality polyamide offer high abrasion resistance, low rolling resistance & smooth running on even floors. Corrosion resistant, provide chemical resistance to alcohol, salts, grease and some acids in mild concentration. Not recommended for epoxy coated floor surfaces. Wheel Bearing Options : Sealed precision ball bearings or roller bearings. Colour : Natural White Temperature range :-40°C to +80°C.

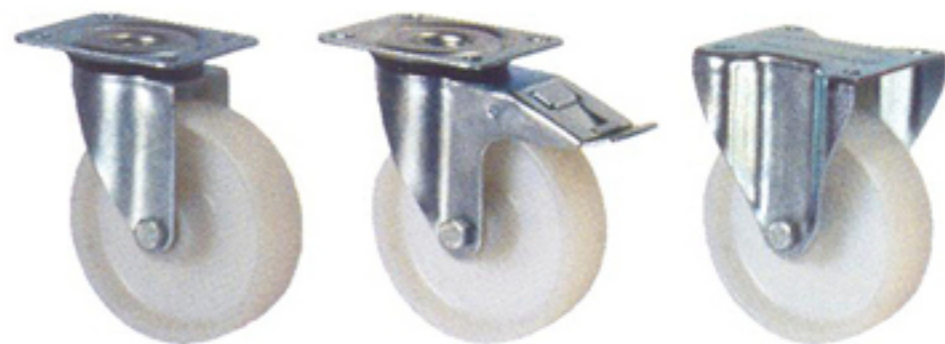

Part No. Swivel Castor	Part No. Swivel With Total Lock	Part No. Rigid Castor (mm)	Wheel Dia x Tread Width (mm)	Overall Height (mm)	Swivel Radius (mm)	Top Plate (mm)	Bolt Hole Centers (mm)	Attaching Bolt Size (mm)	Load Cap. (Kgs)
									
BDS-415S-NY	BDS-415-NY-TL	BDS-415R-NY	100 x 35	128	90	105 x 85	80 x 60	8	250
BDS-515S-NY	BDS-515-NY-TL	BDS-515R-NY	125 x 40	155	105				350
BDS-615S-NY	BDS-615-NY-TL	BDS-615R-NY	150 x 40	190	130	135 x 110	105 x 75-80	10	400
BDS-82S-NY	BDS-82-NY-TL	BDS-82R-NY	200 x 50	238	160				450